





# A20

**GENERAL INFORMATION**

- Universal expansion tank
- Materials:
  - Body: PA
  - Membrane: NBR


**TECHNICAL FEATURES**

- It eliminates the pulsating effect of the pump and supplies a constant flow of water in the required quantity
- It extends the life of the pump and boiler
- It is precharged at 0.9 bars (13 psi) to better fit Fiamma pumps
- It can be charged with the special valve with a normal compressor so it can be adapted to all pumps. Max 8 bar (116 psi)
- Can be installed both horizontally and vertically
- The internal diaphragm absorbs the knockbacks and stabilizes the operation of the pump
- Plug with 1/2" thread

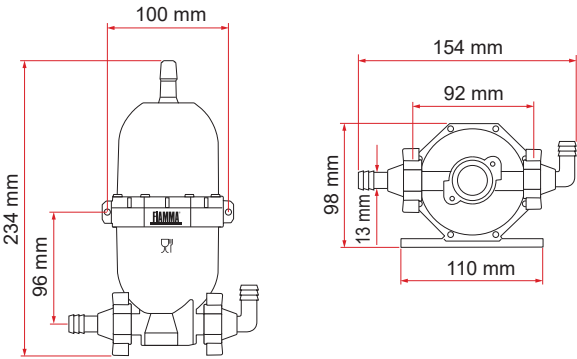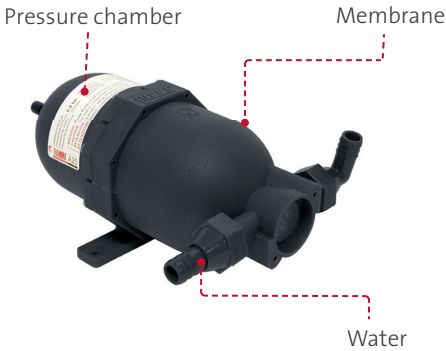

If used with a non-Fiamma pump with a pressure switch set at a higher pressure, it is advisable to increase the preload pressure.

Description	Weight	Item No.	EAN code
A20	0,3kg	02478-02-	8004815450502

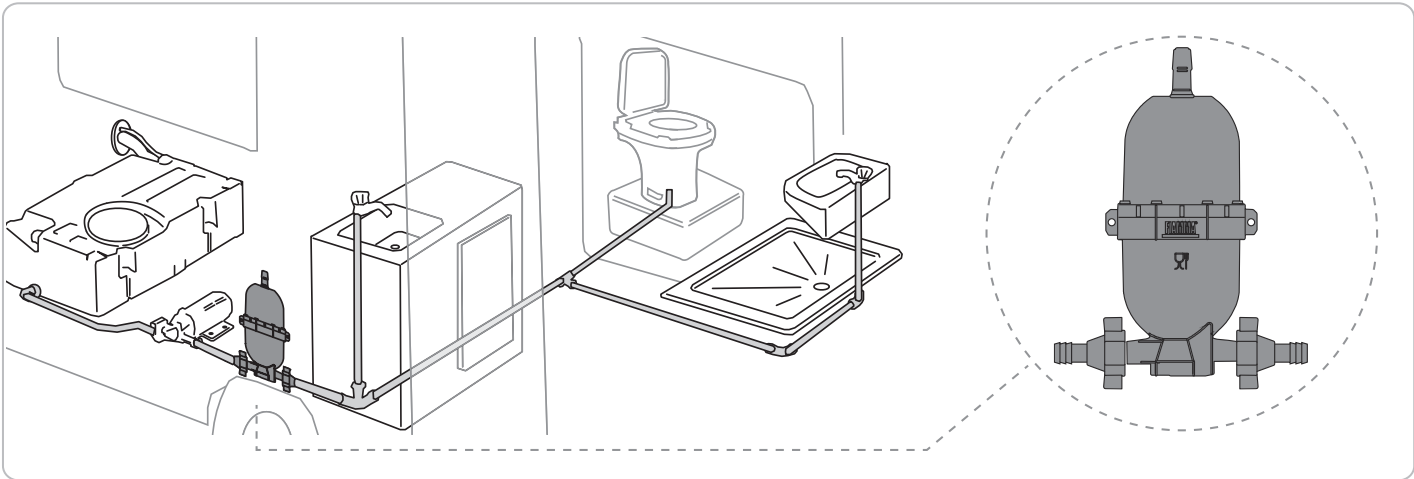

**HOMOLOGATIONS**

- DM 174/2004
- EU 10/2011
- DM 21/03/1973
- KTW certification in progress
- DIN EN 16421

Installation

